



## VRLA Rechargeable Battery

# HR5.5-12 (HR5.5-12FR)



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- The battery is designed for high rate usage.
- Absorbent Glass Mat technology for efficient gas recombination.
- The power density at 5 min~15min discharging rate is 30% higher than BP series.

### APPLICATION

- UPS
- Toy-Cars
- Power Packs
- Emergency Lights
- Fishing Lights



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	5.0Ah @ 10 hour rate F.V.(1.75V/cell)
Approx. Weight	1800g(3.97lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	≤27mΩ (Fully Charged )
Max. Discharge Current	75 A (5 sec.)
Max. Charge Current	1.5 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> <li>• IEC 61056-1</li> <li>• JIS C 8702-1</li> <li>• GB/T 19639.1</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

#### Length

90±1.5 (3.54±0.06)

#### Width


70±1.5 (2.76±0.06)

#### Container Height


102±1.5 (4.02±0.06)

#### Total Height


106±2.0 (4.17±0.08)

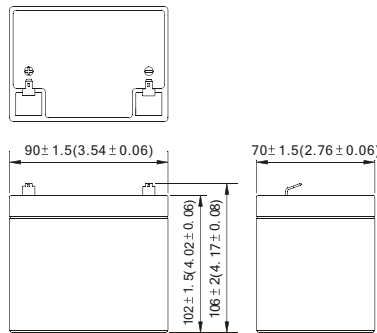

#### Terminal T1



#### Terminal T2



### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	225.5	154.0	111.5	95.2	72.4	55.0	46.0	40.5	22.3
1.70V	269.5	171.9	121.3	100.8	75.4	57.1	47.4	41.4	22.7
1.60V	288.8	180.8	126.8	104.5	77.0	58.4	48.4	42.1	23.1
1.50V	297.0	184.3	129.6	106.2	78.0	59.2	49.0	42.5	23.2
1.40V	302.5	186.8	131.0	107.1	78.5	59.5	49.4	42.8	23.3
1.30V	305.3	188.4	132.0	107.8	79.0	59.8	49.6	42.9	23.3

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	20.13	13.51	9.65	8.16	6.14	4.63	3.85	3.38	1.86
1.70V	24.50	15.08	10.49	8.64	6.39	4.80	3.97	3.45	1.89
1.60V	26.25	15.86	10.97	8.96	6.53	4.91	4.05	3.51	1.93
1.50V	27.00	16.17	11.21	9.11	6.61	4.98	4.10	3.54	1.93
1.40V	27.50	16.39	11.33	9.19	6.65	5.00	4.13	3.57	1.94
1.30V	27.75	16.53	11.42	9.25	6.69	5.03	4.15	3.58	1.94

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.